


CHECK VALVE FEATURES & SPECIFICATIONS

TECHNICAL SECTION

FEATURES

ZERO LEAKAGE (Less Than 1 D.P.M.)
FULL FLOW with Low Opening Pressure

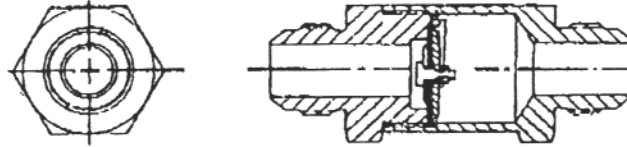


SPECIFICATIONS

Service Application: Water, Fuel, Oil
Temperature Range: -70 F to 350 F
Type of Port: Male 37 Flare with SAE thread

MATERIALS

Body and Cap: 6061 T6 Aluminum Alloy - Hard Anodized
Internal Parts: 6061 T6 Aluminum Alloy - Hard Anodized and Stainless Steel
Seal: Aluminum Crush Washer
Seat: Reinforced Viton

Pressure Range: -6 to -12, 350 P.S.I.
Sizes: -4, -6, -8, -10, -12
Internal Leakage: .01 cc/min. Max
Mounting: Hinge Facing Up

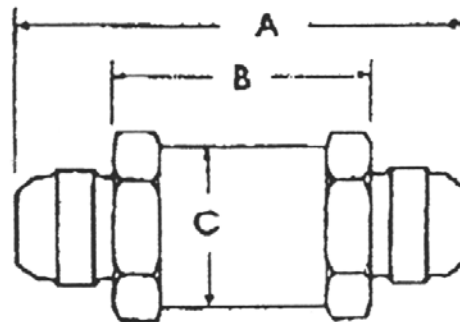

Check Valves pg.37

PART NO.	SAE THREAD SIZE	TUBE SIZE	A + OR -.005	B + OR -.005	C + OR -.005	HEX
253004ERL	7/16-20	1/4	2.375	1.270	.865	7/8
253006ERL	9/16-18	3/8	2.370	1.260	.865	7/8
253008ERL	3/4-16	1/2	2.645	1.335	.925	15/16
253010ERL	7/8-14	5/8	3.285	1.770	1.230	1-1/4
253012ERL	1-1/16-12	3/4	3.535	1.810	1.480	1-1/2